


General: How to use spam digest with MailScan?

How to configure and use spam digest with MailScan?

Execute SDigest32.exe from %Program Files%\MailScan\ folder

(For 64 bit system, SDigest64.exe file to be executed)

Upon execution for the first time, the user will be presented with a GUI.

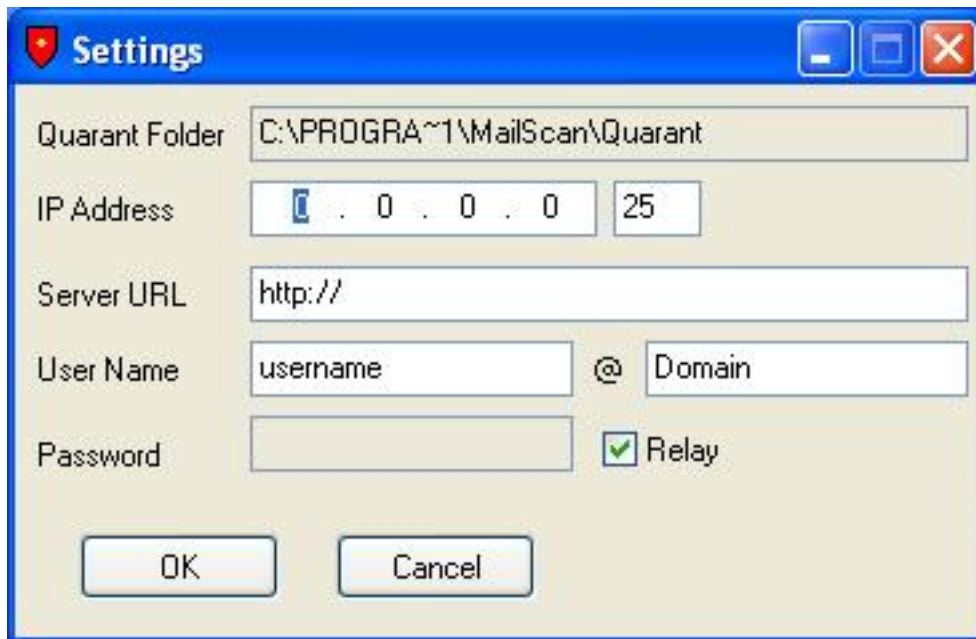


The image shows a Windows-style dialog box titled "Settings" with a red shield icon. It contains several input fields and a checkbox. The "Quarant Folder" field is set to "C:\PROGRA~1\MailScan\Quarant". The "IP Address" field is split into four boxes containing "0", "0", "0", and "25". The "Server URL" field contains "http://". The "User Name" field contains "username" and the "Domain" field contains "Domain". The "Password" field is empty. There is a checked checkbox labeled "Relay". At the bottom are "OK" and "Cancel" buttons.

Quarant Folder	C:\PROGRA~1\MailScan\Quarant		
IP Address	0	0	0
Server URL	http://		
User Name	username	@	Domain
Password		<input checked="" type="checkbox"/>	Relay

Fill up the settings which correspond to the setup at your organization.

General: How to use spam digest with MailScan?

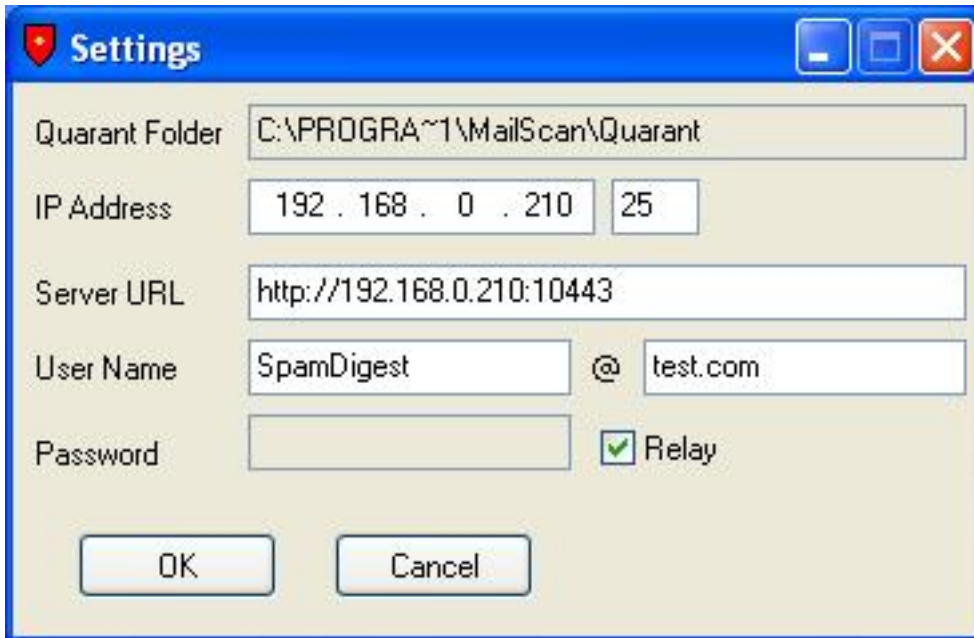


The image shows a 'Settings' dialog box for MailScan. It has a blue title bar with a red shield icon and the word 'Settings'. The fields are as follows:

Field	Value
Quarant Folder	C:\PROGRA~1\MailScan\Quarant
IP Address	192 . 168 . 0 . 210 25
Server URL	http://192.168.0.210:10443
User Name	SpamDigest @ test.com
Password	
Relay	<input checked="" type="checkbox"/> Relay

At the bottom are 'OK' and 'Cancel' buttons.

Organizations who have created an additional email user for handling SPAM Digest email and want to enable authentication , can do so by disabling the “Relay” and providing the password for the email user.

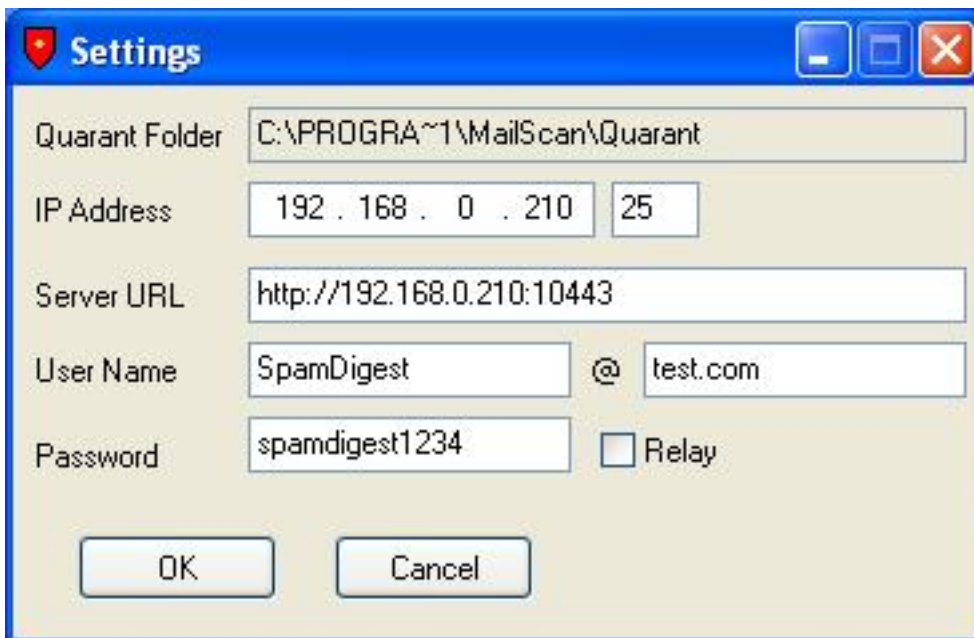

The image shows the same 'Settings' dialog box for MailScan, but with different values:


Field	Value
Quarant Folder	C:\PROGRA~1\MailScan\Quarant
IP Address	192 . 168 . 0 . 210 25
Server URL	http://192.168.0.210:10443
User Name	SpamDigest @ test.com
Password	spamdigest1234
Relay	<input type="checkbox"/> Relay

At the bottom are 'OK' and 'Cancel' buttons.

After filling up all the values, Click “OK”, to complete the setup.

Two files are created in the “sdgst” directory inside the directory of mailscan.


General: How to use spam digest with MailScan?

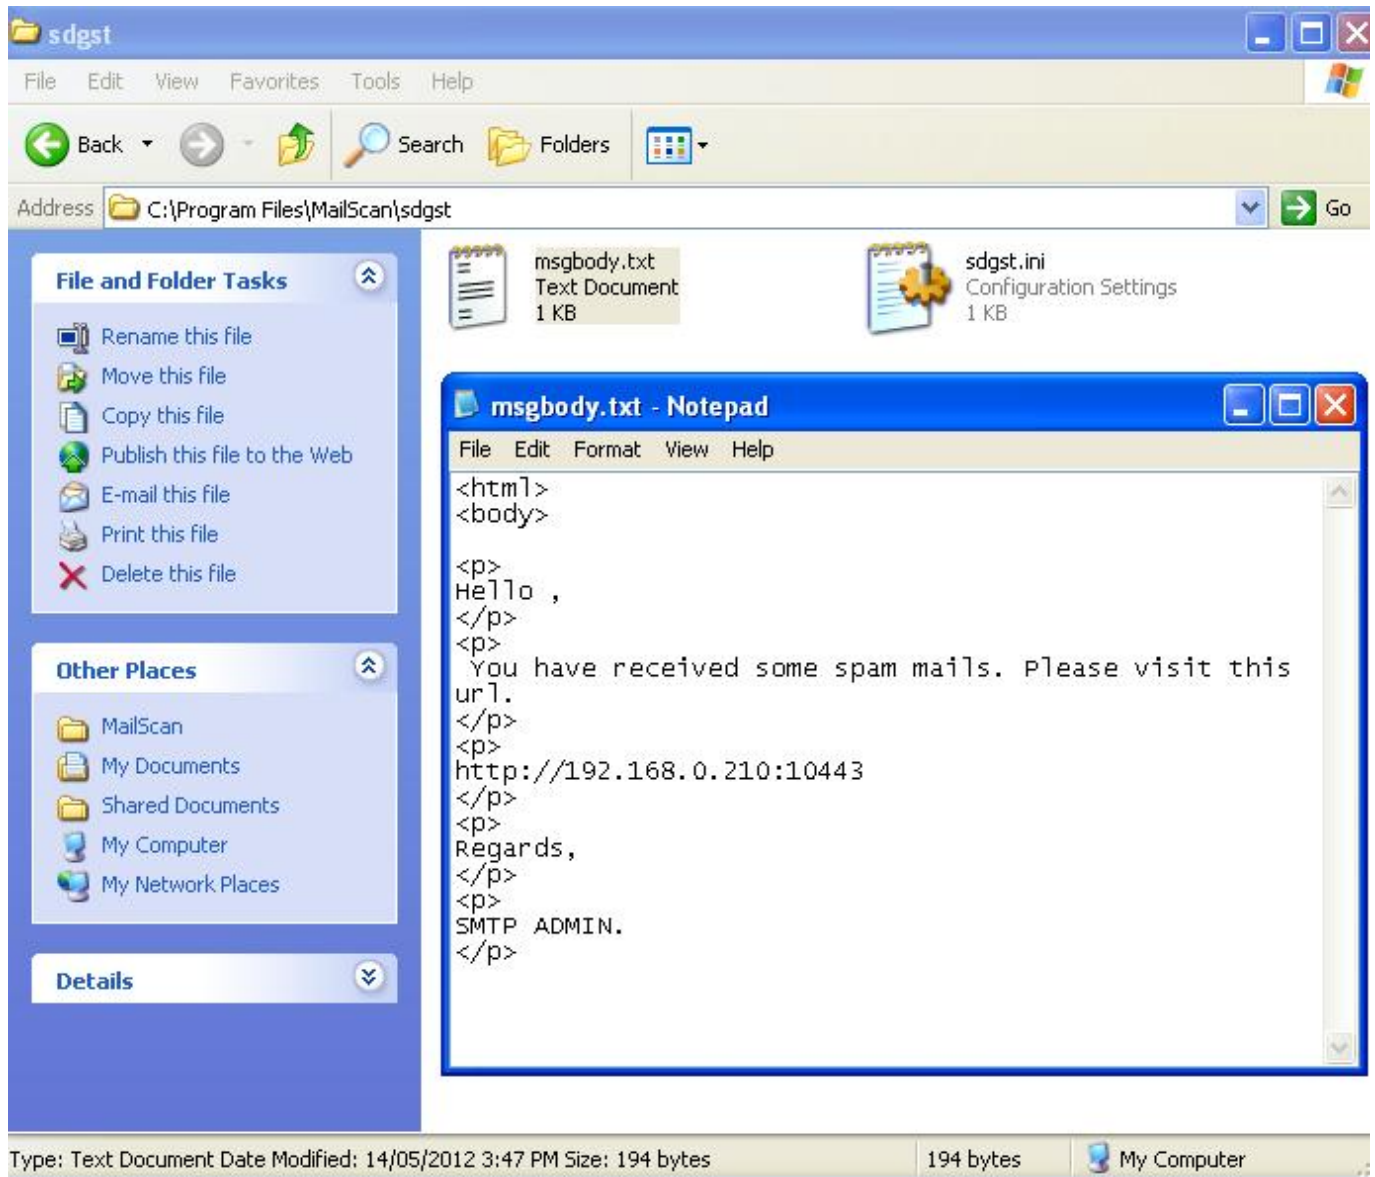

Msgbody.txt can be modified to change the message body which will be sent to the users. Please note, the messagebody.txt does not terminate with `</html>` and this will be added by the Spam Digest tool at the time of execution.

Admin MSG Body


General: How to use spam digest with MailScan?

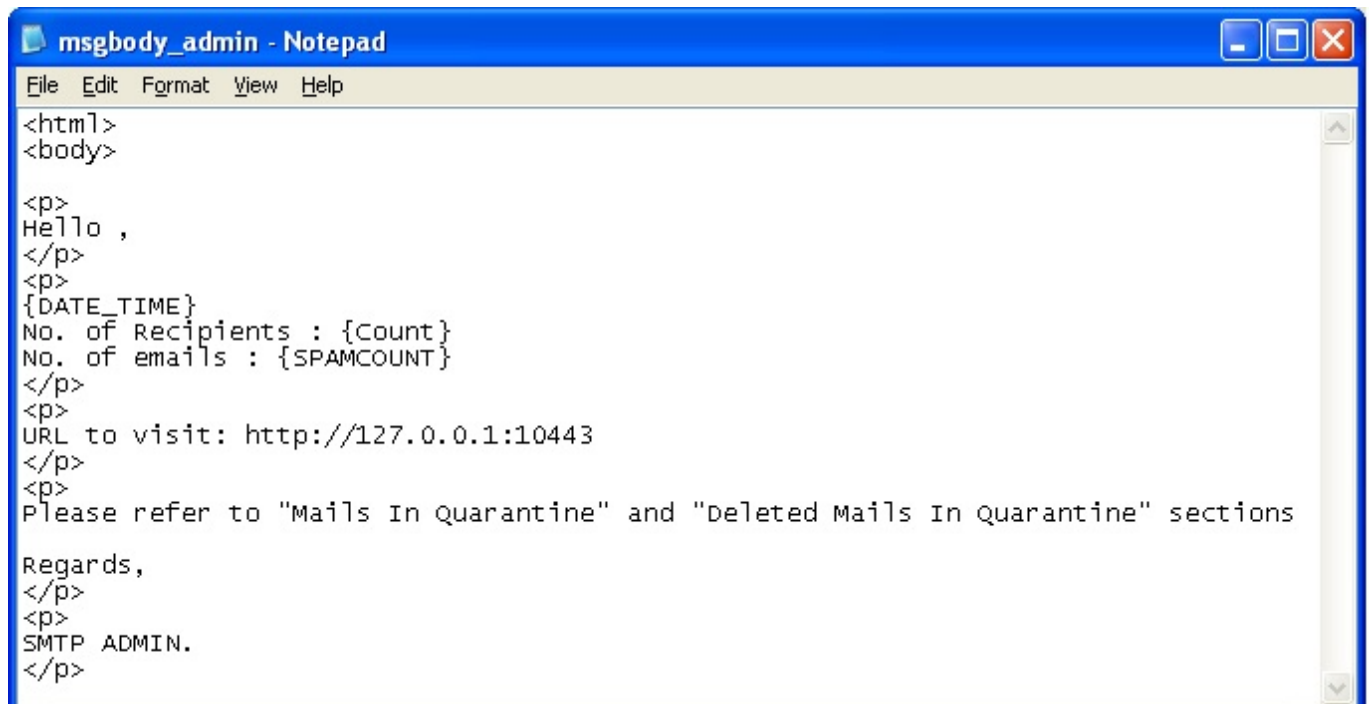

```
msgbody_admin - Notepad
File Edit Format View Help
<html>
<body>

<p>
Hello ,
</p>
<p>
{DATE_TIME}
No. of Recipients : {Count}
No. of emails : {SPAMCOUNT}
</p>
<p>
URL to visit: http://127.0.0.1:10443
</p>
<p>
Please refer to "Mails In Quarantine" and "Deleted Mails In Quarantine" sections
</p>
<p>
Regards,
</p>
<p>
SMTP ADMIN.
</p>
```

Sdgst.ini

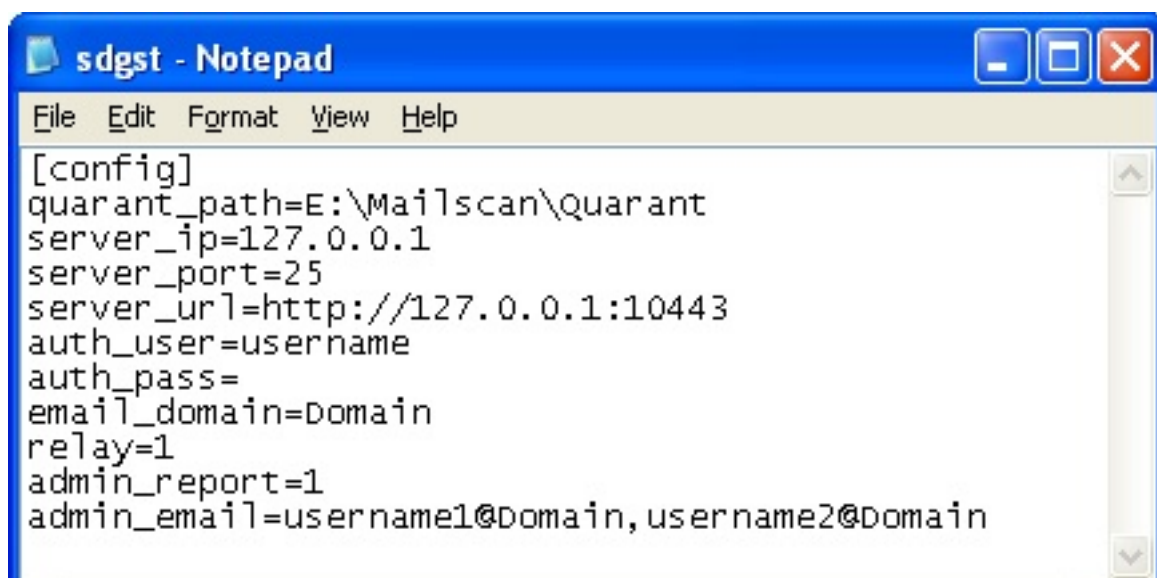


```
sdgst - Notepad
File Edit Format View Help
[config]
quarant_path=E:\Mailscan\Quarant
server_ip=127.0.0.1
server_port=25
server_url=http://127.0.0.1:10443
auth_user=username
auth_pass=
email_domain=Domain
relay=1
admin_report=1
admin_email=username1@Domain,username2@Domain
```

admin_report=0

admin_report=1

admin_report=2


General: How to use spam digest with MailScan?

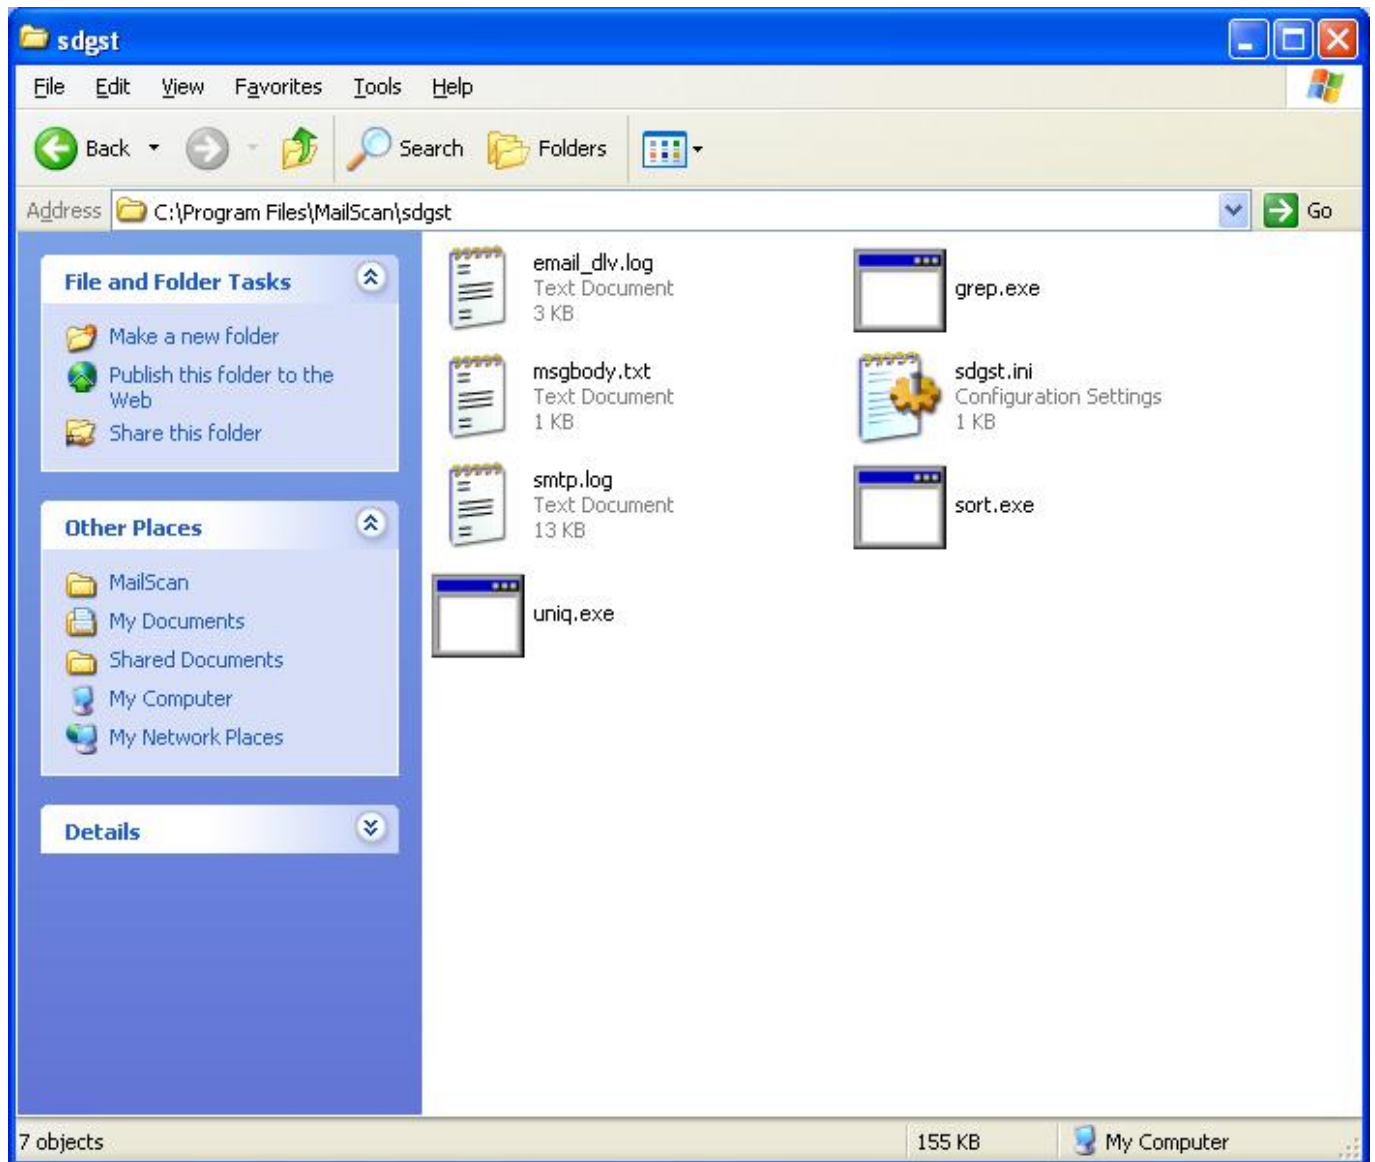

To Run Spam Digest, run sdigest.exe

After the execution of SpamDigest , a few files will be created email_dlv.log and smtp.log are the log files and the remaining executables are required by SpamDigest.

General: How to use spam digest with MailScan?

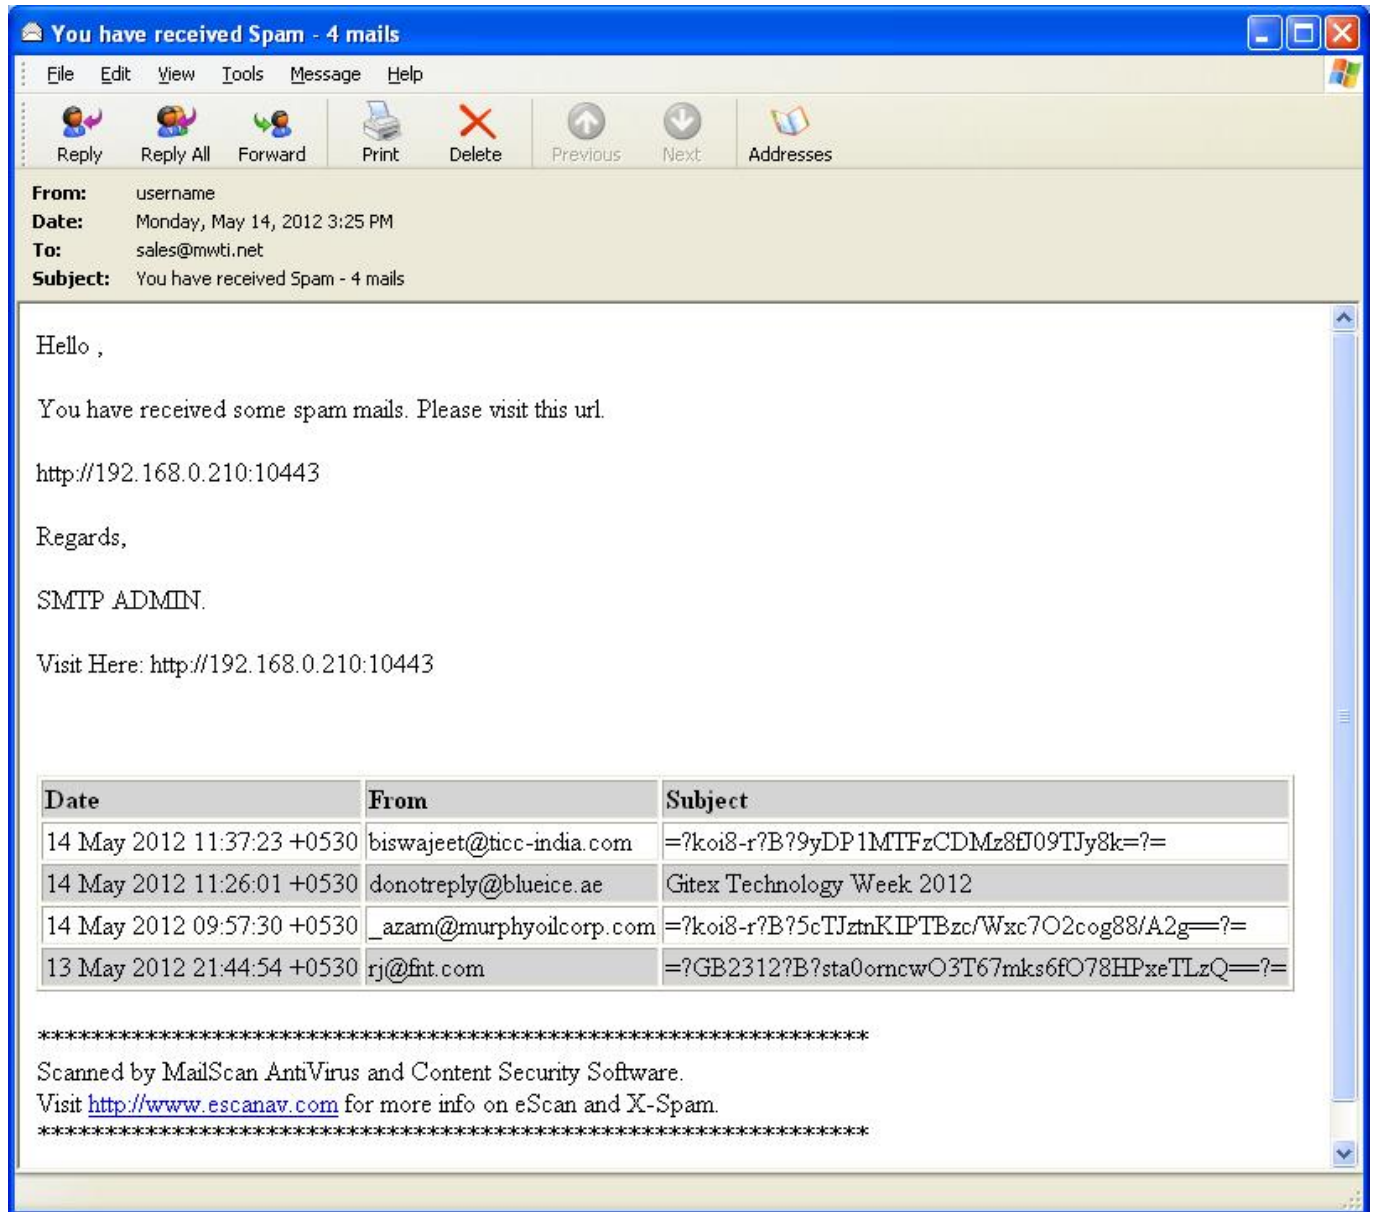

The end-user will receive an email as shown in the above screen-grab.

General: How to use spam digest with MailScan?

The screenshot shows an email client window titled "MailScan Quarantine reports - 23:55:13-18/01/2013 - Mes...". The email body contains the following text:

File Message
F H
This message was sent with High importance.
From: [Redacted]
To: [Redacted]
Cc: [Redacted]
Subject: MailScan Quarantine reports - 23:55:13-18/01/2013

Hello ,

23:55:13-18/01/2013 No. of Recipients : 15 No. of emails : 20

URL to visit: [http://\[Redacted\]](http://[Redacted])

Please refer to "Mails In Quarantine" and "Deleted Mails In Quarantine" sections Regards,
SMTP ADMIN.

[http://\[Redacted\]:10443](http://[Redacted]:10443)

Count	Recipient
1	[Redacted]
1	[Redacted]
1	[Redacted]
2	[Redacted]
3	[Redacted]
1	[Redacted]

MailScan administrators, in order to provide web-access to the end-users for removing spam, should follow the below mentioned steps in order to enable authentication. If these steps are skipped then end-users will not be able to login into the web-server interface, which lists the spam emails received by that user.

To configure authentication in MailScan you can refer to the link given below

<http://download1.mwti.net/download/wikifiles/mailscan/LDAPHelp.pdf>

Unique solution ID: #1088

Author: aniket

General: How to use spam digest with MailScan?

Last update: 2015-06-23 12:33